

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60220687

Customer pos. no.:

Model :

Esybox Pop GAS 1x220-240 50/60 Schuko


Pump data

Max working pressure : 600 kPa
Min. fluid temperature : 5 °C
Max. fluid temperature : 50 °C
Max. Ambient temperature : 50 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 2.34 kPa

Curve tolerance according to ISO 9906

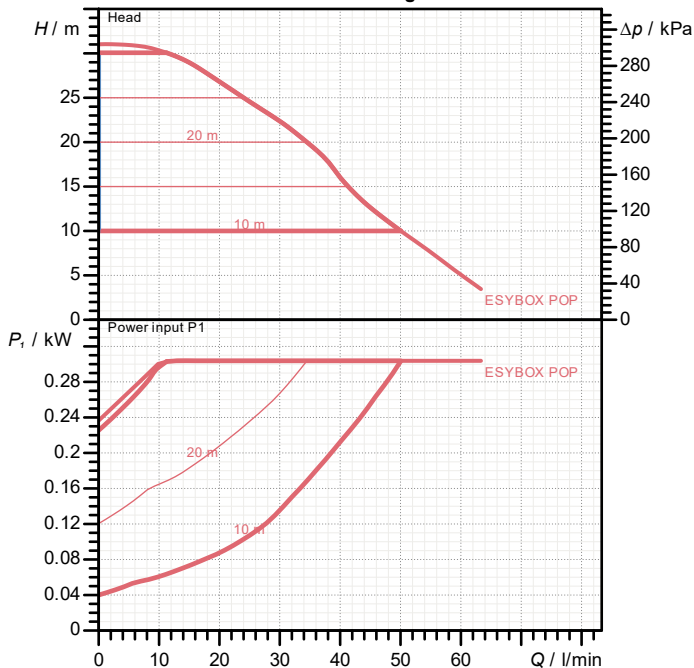


Materials

Motor liner : Stainless Steel AISI 304
Impeller : Technopolymer

Hydraulic data (duty point)

Flow :
Head :

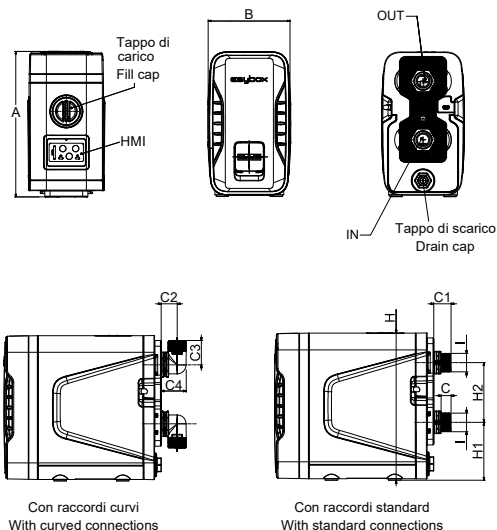

Dimensions in mm

A	226.5	C4	36.2	I Ø	3/4"		
B	120.3	DNA	3/4"				
C	14	DNM	3/4"				
C1	24.7	H	209.3				
C2	23	H1	82.3				
C3	35	H2	85				

Weight : 4.4 kg

Pump connection

Suction side : 3/4 " / 600 kPa
Discharge side : 3/4 " / 600 kPa

Motor data


Max. Power input P1 : 0.3 kW
Rated speed : 4700 1/min
Rated voltage : 1~ 220-240 V 50 Hz
Nominal current : 1.5 A
Degree of protection : IP X5

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Esybox Pop GAS 1x220-240 50/60 Schuko

Curve tolerance according to ISO 9906

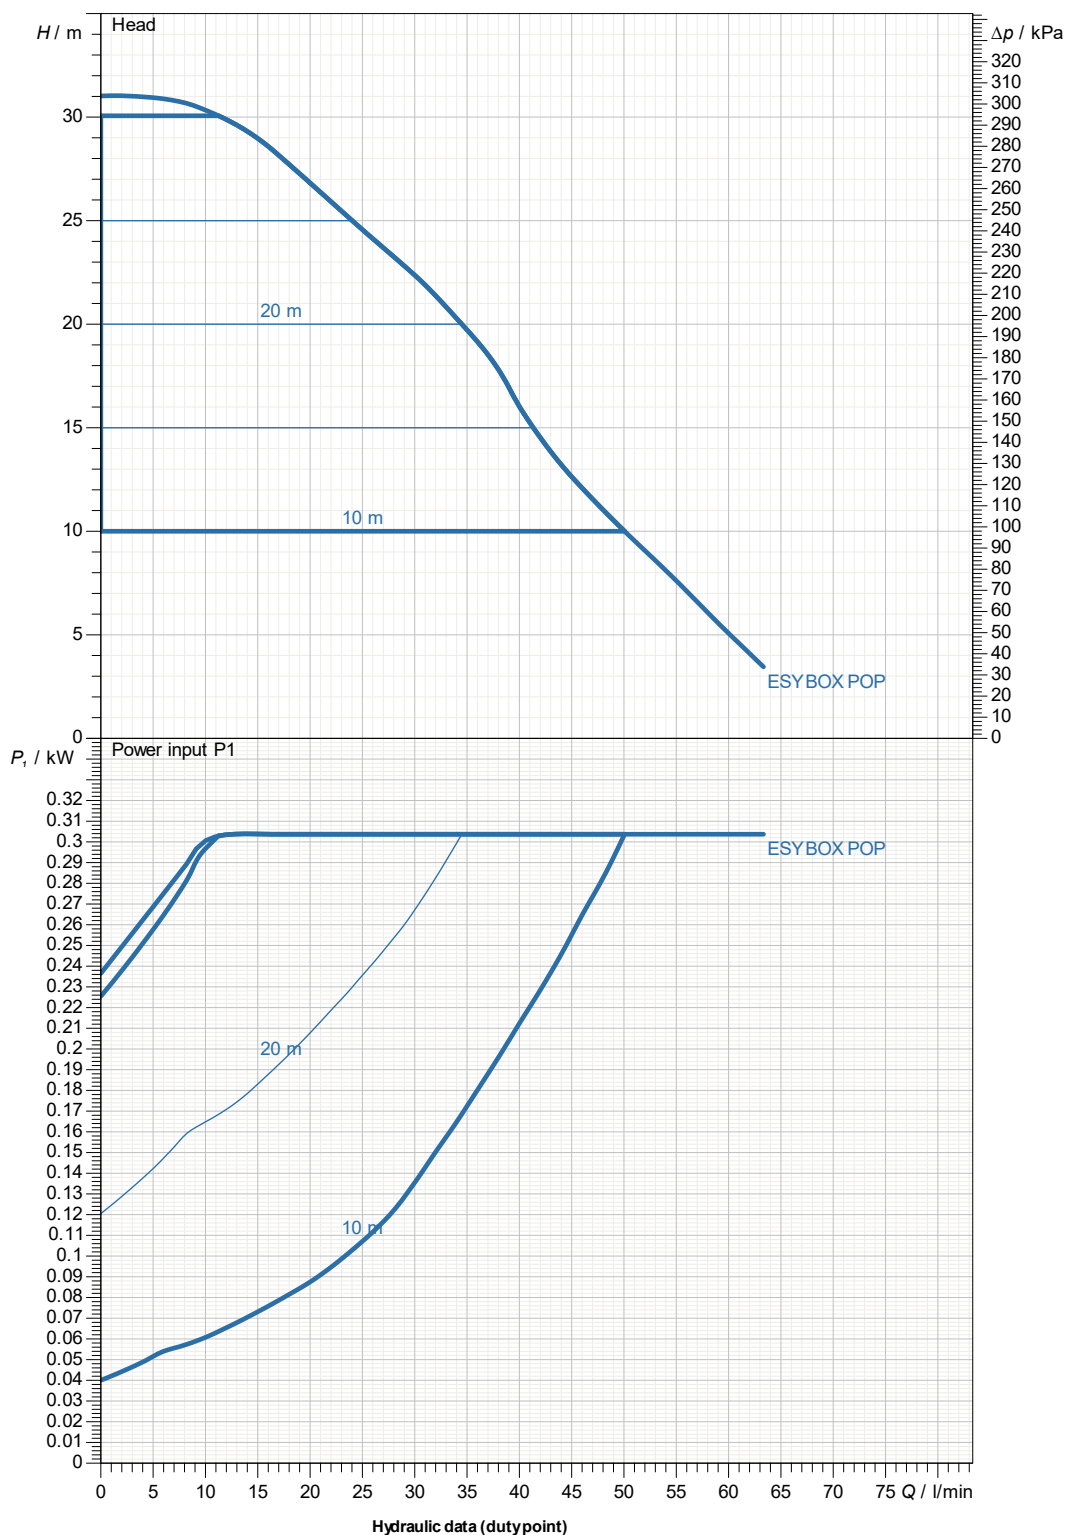

Suction side :

3/4 "

600 kPa

Discharge side :

3/4 "

600 kPa

Flow :

Head :

Rated speed :

4700 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_



ISSUE_DATE

2026-07-20


Receiver

Company
Reference
Address
Phone
Fax
E-mail

Esybox Pop GAS 1x220-240 50/60 Schuko

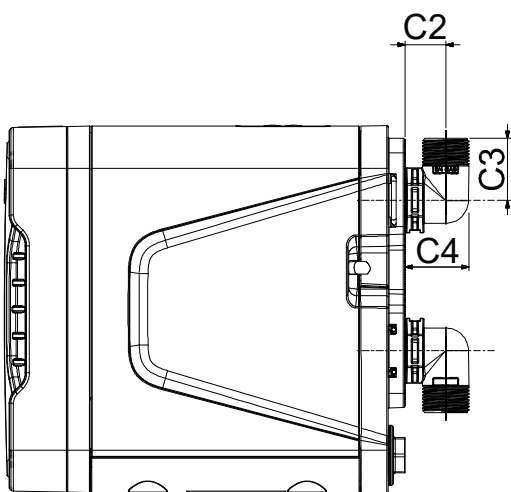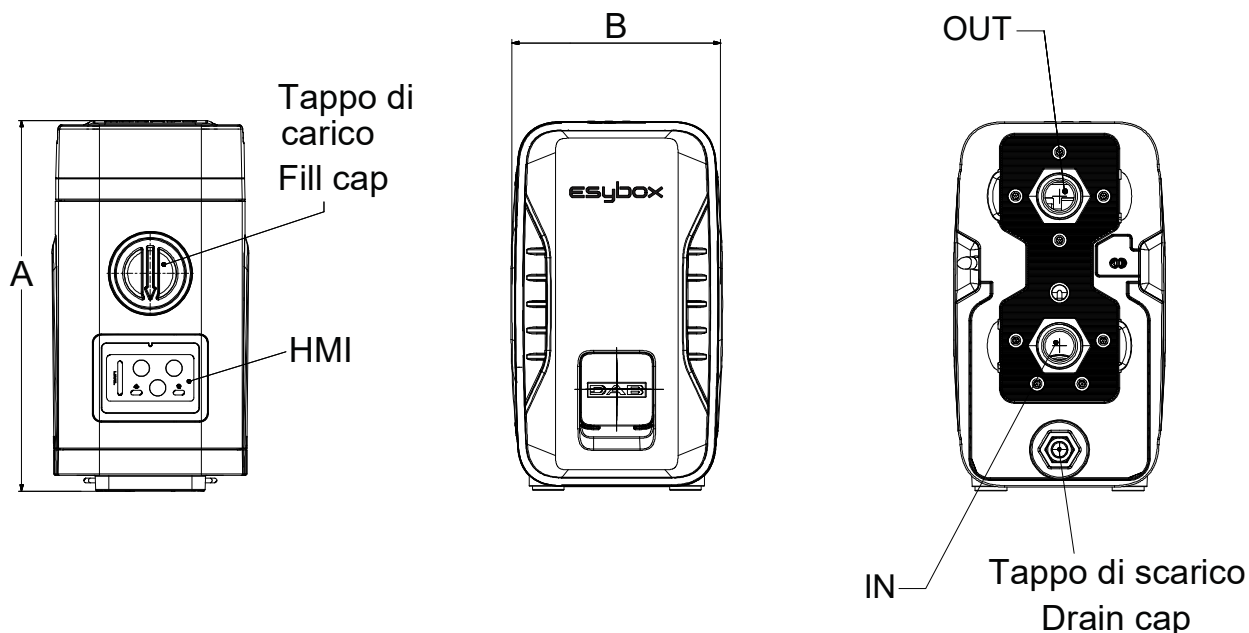

Con raccordi curvi
With curved connections

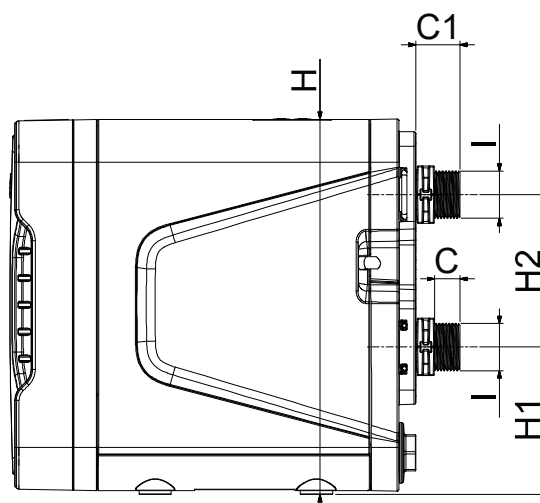

Con raccordi standard
With standard connections

Dimensions in mm						Pump connection
1	A	226.5	1 Ø	3/4"		Suction 3/4 " 600 kPa
2	B	120.3				
3	C	14				
4	C1	24.7				
5	C2	23				Discharge 3/4 " 600 kPa
6	C3	35				
7	C4	36.2				
8	DNA	3/4"				
9	DNM	3/4"				
10	H	209.3				
11	H1	82.3				
12	H2	85				
MAIN_PROJECT_TITLE			BUSINESS_PROCESS_ID		OWNER_	ISSUE_DATE 2026-07-20