

Receiver

Company
Reference
Address
Phone
Fax
E-mail

Drainage station

FEKABOX 200

Item n° :

60162080

Pump type

FEKA VS 1500 M - A 50 Hz 230 mY26

Item n° :

60219351H

Pump data

Pressure rating : --
Min. fluid temperature : 0 °C
Max. fluid temperature : 45 °C
Max. Ambient temperature :

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998 kg/m³
Kinematic viscosity : 1 mm²/s
Vapor pressure : 2.34 kPa

Hydraulic data (duty point)




Flow :

Head :

Materials

Tank LLDPE

Curve tolerance according to ISO 9906

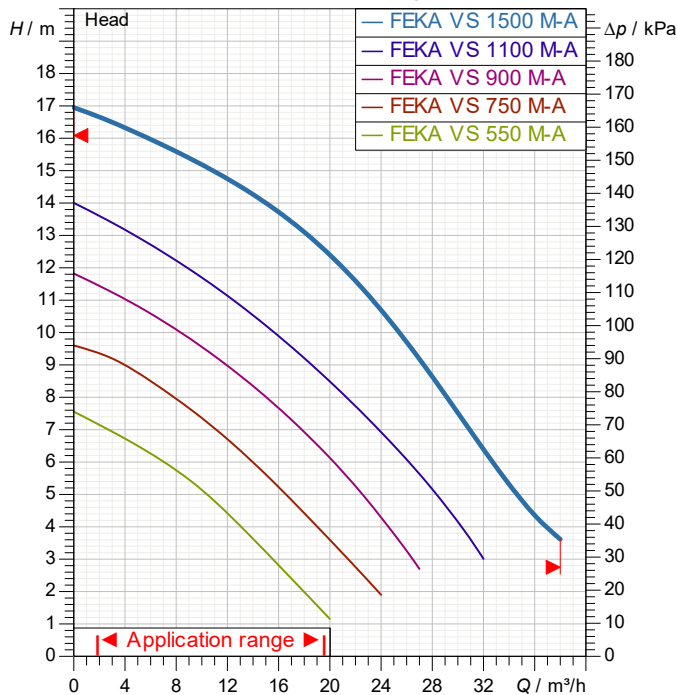

Tank weight : 23.2 kg

Motor data

Motor brand : DAB
Nominal power P2 : 1.5 kW
Rated speed : 2800 1/min
Rated voltage : 1~ 220-240 V 50 Hz
Nominal current : 9.1 A
Degree of protection : IP 68

Dimensions in mm

Pump connection


Suction side : DN 50/110
Ventilation : DN 50
Discharge side : 2" G

Receiver

Company
Reference
Address
Phone
Fax
E-mail

FEKABOX 200

Curve tolerance according to ISO 9906

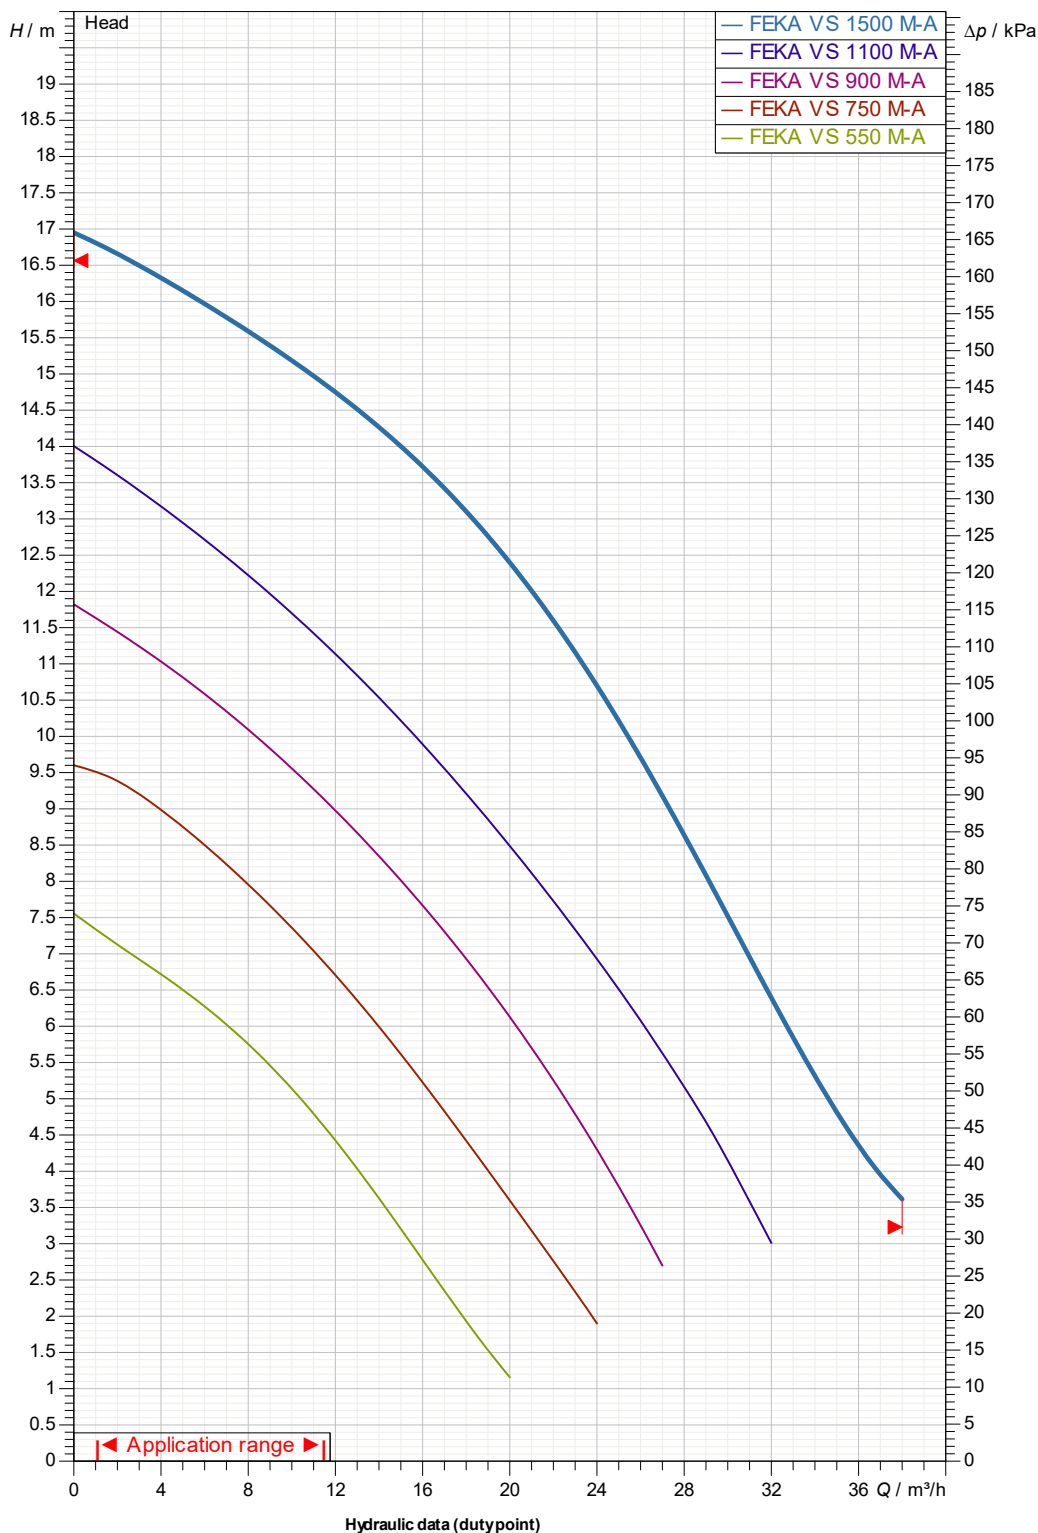

Suction side :
DN 50/110
--

Discharge side :
2" G
--

Flow :

Head :

Rated speed :
2800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_



ISSUE_DATE

2026-09-07

Receiver

Company
Reference
Address
Phone
Fax
E-mail

FEKABOX 200

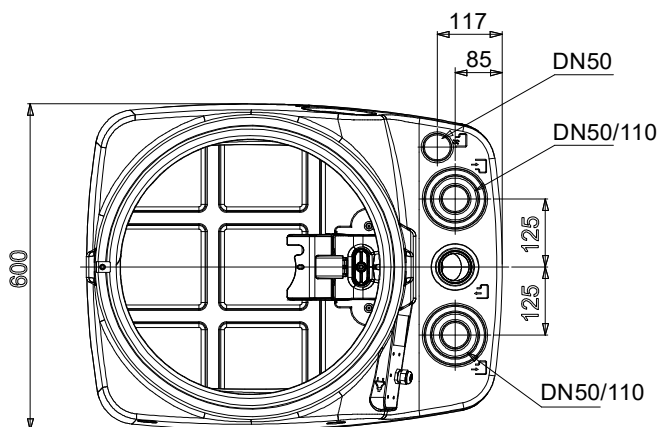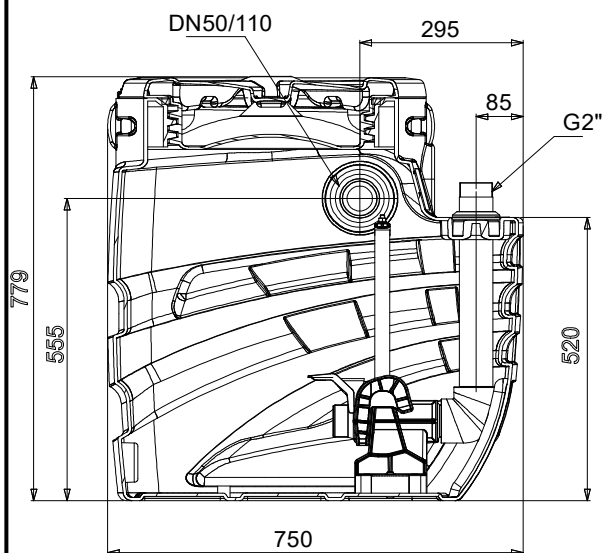

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

Suction
DN 50/110
--

Discharge
2" G
--

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE

2026-09-07