

Receiver
From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60122213

Customer pos. no.:
Model :

EUROSWIM 300 M

Pump data

Pressure rating : 36,26 psi

Min. fluid temperature : 0 °C

Max. fluid temperature : 60 °C

Max. Ambient temperature : 50 °C

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 0,34 psi



Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Reinforced technopolymer
Impeller	Reinforced technopolymer
Diffuser	Reinforced technopolymer
Filter	Technopolymer
Mechanical seal	Carbon/Alumina/NBR/AISI316
Filter cover	Polycarbonate
O-ring	NBR

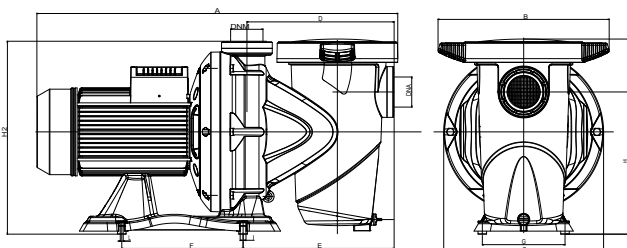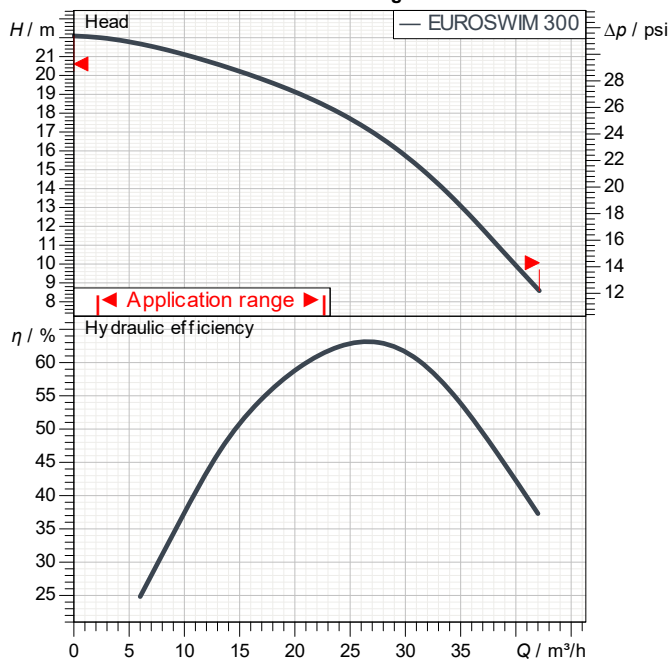Curve tolerance according to ISO 9906

Weight : 23,9 kg

Motor data

Motor brand : DAB
Nominal power P2 : 2,2 kW
Rated speed : 2.800 1/min
Rated voltage : 1~ 220-240 V 50 Hz
Nominal current : 12 A
Degree of protection : IP X5

Dimensions in mm

A	648	L	6,5
B	311		
C	290		
D	267		
DNA	G2"		
DNM	G2"		
E	274		
F	220		
G	150		
H	387		
H1	258		
H2	350		
I	11		

Pump connection

Suction side : 2" G / 36,26 psi
Discharge side : 2" G / 36,26 psi


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

EUROSWIM 300 M

Curve tolerance according to ISO 9906

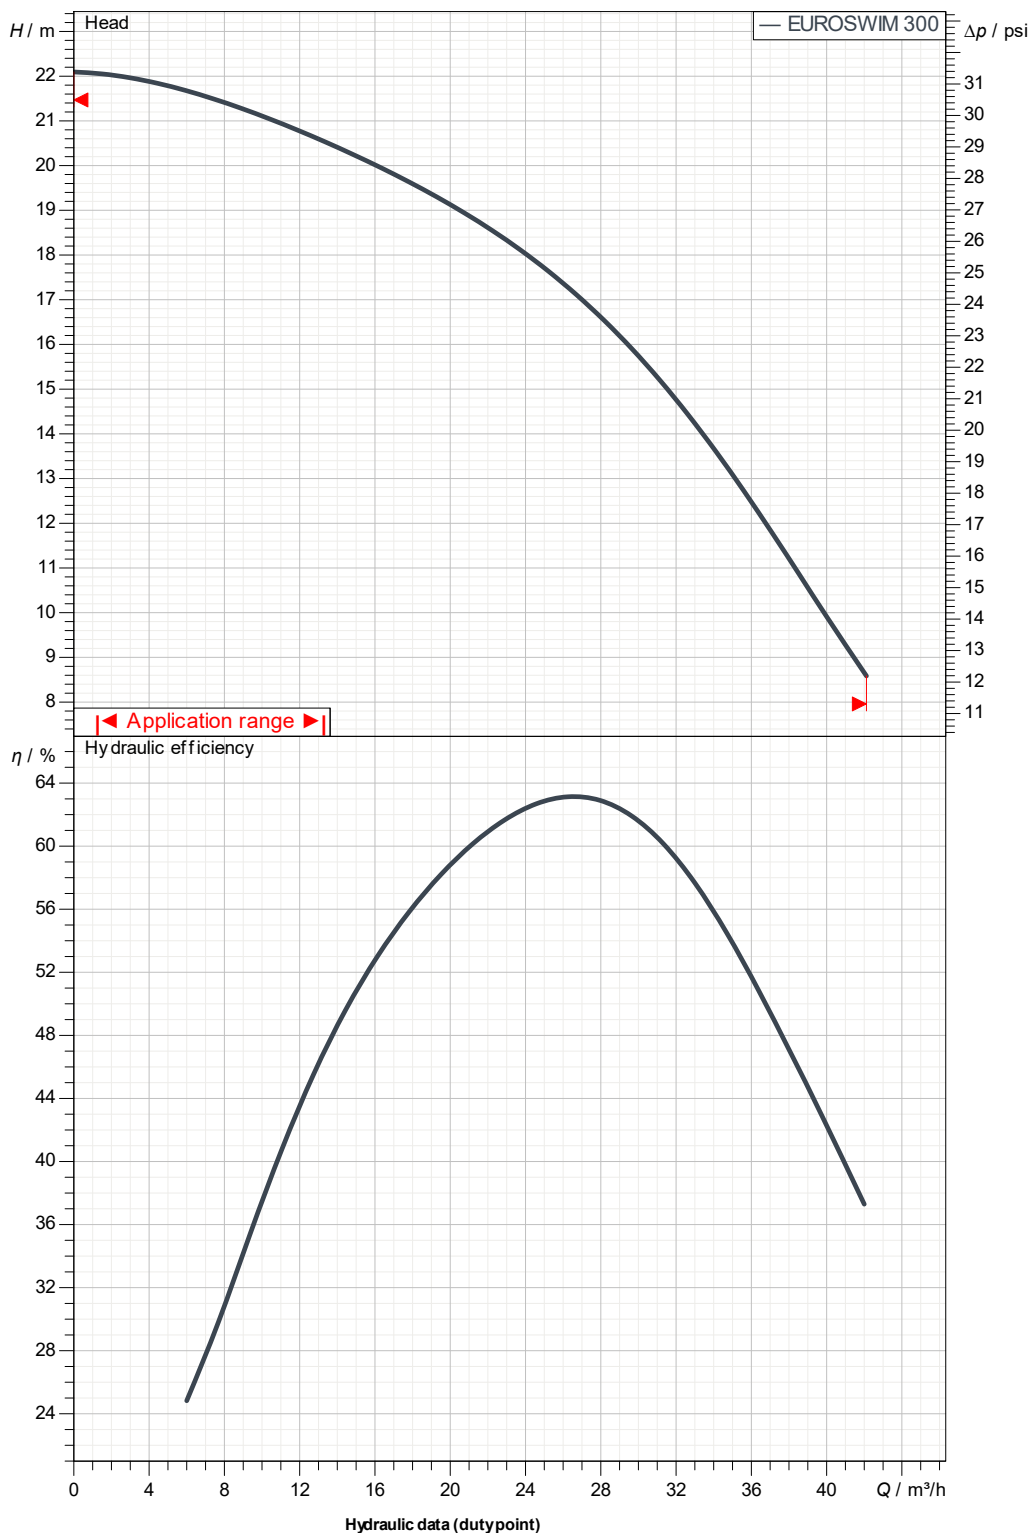

Suction side :
2" G
36,26 psi

Discharge side :
2" G
36,26 psi

Flow :

Head :

Rated speed :
2.800 1/min

Project

Project ID

Created by

Created on

2024-09-09



DIMENSIONAL DRAWING

2024-09-09

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

EUROSWIM 300 M

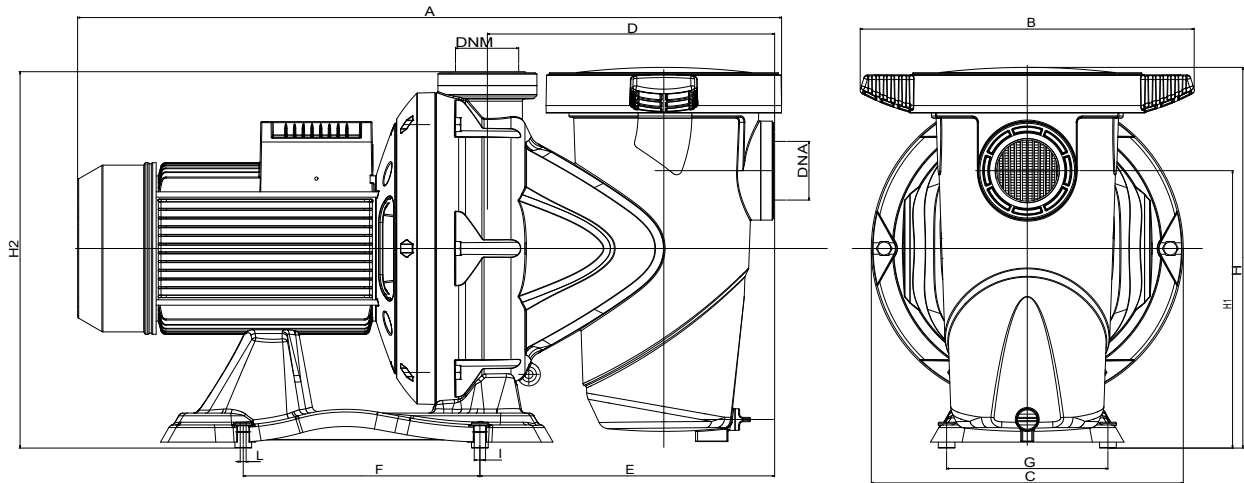

Dimensions in mm							Pump connection
1	A	648	H2	350			Suction 2" G 36,26 psi
2	B	311	I	11			
3	C	290	L	6,5			
4	D	267					Discharge 2" G 36,26 psi
5	DN	G2"					
6	DN1	G2"					
7	E	274					
8	F	220					
9	G	150					
10	H	387					
11	H1	258					
Project			Project ID			Created by	Created on 2024-09-09