

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

Customer pos. no.:

60115704.

Model :

EUROCOVER

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 0,34 psi

Hydraulic data (duty point)




Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
O-Ring	NBR Rubber
Motor top body	Stainless Steel AISI 304
Motor shaft	Stainless Steel AISI 416
Suction strainer	Technopolymer
Float	Technopolymer

Curve tolerance according to ISO 9906

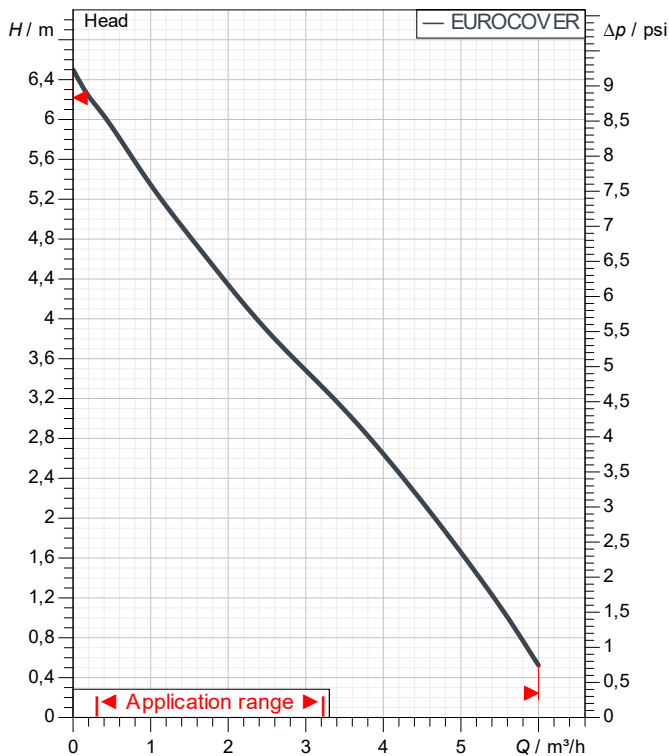

Motor data

Motor brand : DAB

Nominal power P2 : 0,22 kW

Rated speed : 2.800 1/min

Rated voltage : 1~ 220-240 V

Nominal current :

Degree of protection : IP 68

50 Hz

Weight : 4,6 kg

Dimensions in mm

--	--	--	--	--	--	--	--

Pump connection

Suction side : /

Discharge side : /


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

EUROCOVER

Curve tolerance according to ISO 9906

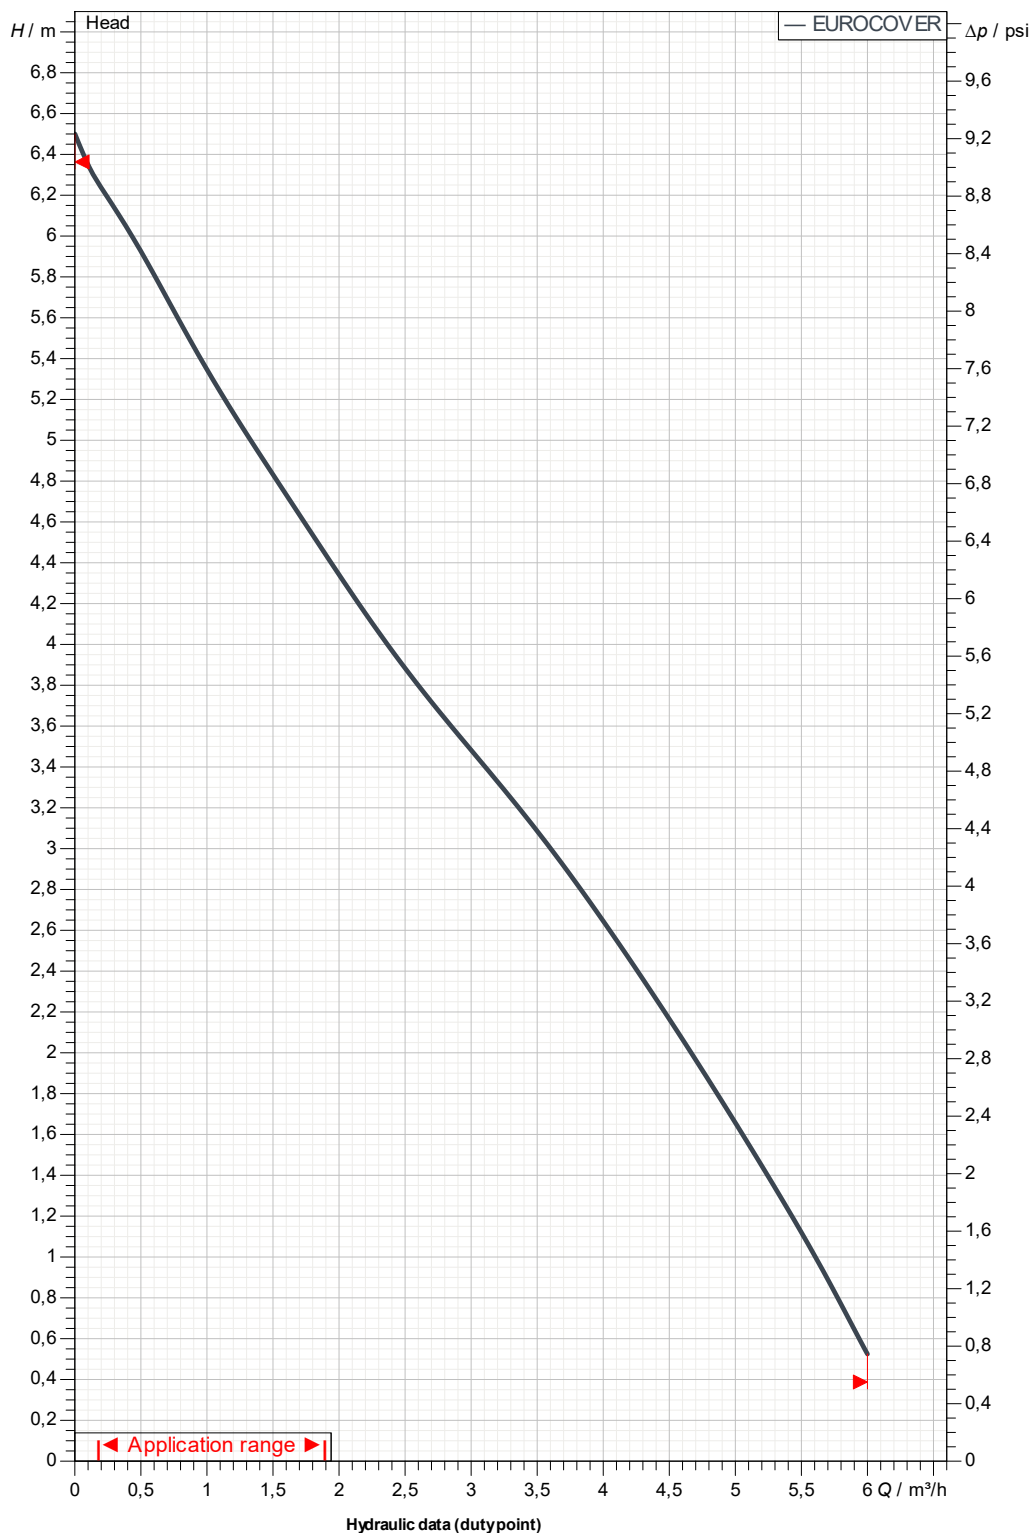

Suction side :

Discharge side :

Flow :

Head :

Rated speed :
2.800 1/min

Project

Project ID

Created by

Created on

2025-04-01



DIMENSIONAL DRAWING

2025-04-01

Page 3 / 3



DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

EUROCOVER

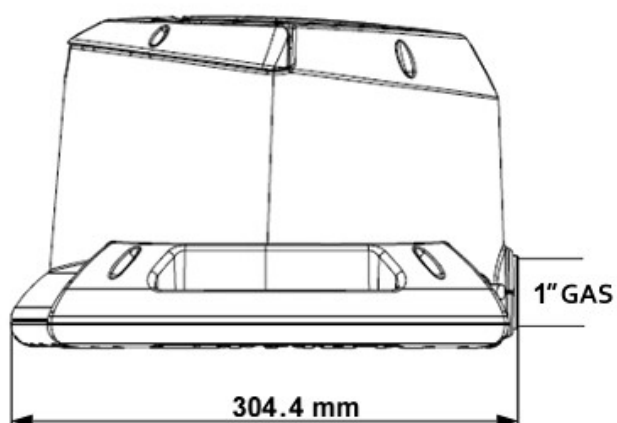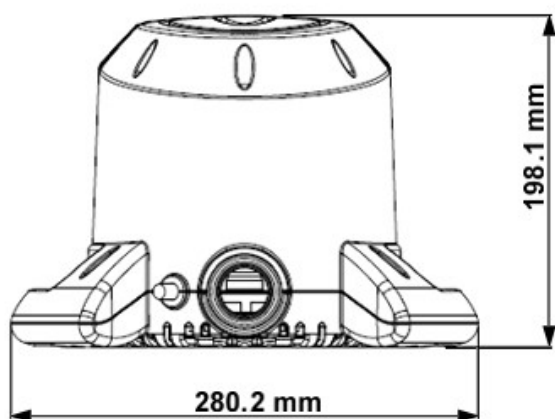

Dimensions in mm

Pump connection

1
2
3
4
5
6
7
8
9
10
11

Suction

Discharge

Project

Project ID

Created by

Created on

2025-04-01